

# Бюджетные мониторы серии FPM-2000

## ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

**По вопросам продаж и поддержки обращайтесь:**

Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

# FPM-2170G

## 17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



### Features

- 17" SXGA TFT LED LCD with 50,000 backlight life time
- Robust design with aluminum front panel
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

### Introduction

The FPM-2170G is an industrial-grade 17" TFT LCD with LED backlight flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 17" LCD with LED backlight monitor on the market. The FPM-2170G are also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2170G are especially suitable for industrial PCs such as IPC-610 or IPC-6806. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 413.72 x 347.22 x 52.13 mm (16.29" x 13.67" x 2.05")
- **Enclosure** Front panel: Aluminum, Rear cover: SECC chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 5.60 kg (12.34 lbs)

#### LCD Display

- **Display Type** SXGA TFT LCD with LED Backlight
- **Display Size** 17"
- **Max. Resolution** 1280 x 1024
- **Max. Color** 16.7M
- **Viewing Angle (H/V)°** 170°(V), 160°(H)
- **Luminance (cd/m<sup>2</sup>)** 350
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 1000:1

#### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP, Vista, 7, 8, XPe, CE and Linux

#### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65 Compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-2170G-X0AE** 17" SXGA Industrial LED Monitor
- **FPM-2170G-R3AE** 17" SXGA Industrial LED Monitor w/Resistive TS (RS-232 and USB interfaces)

## Dimensions

Unit: [mm]

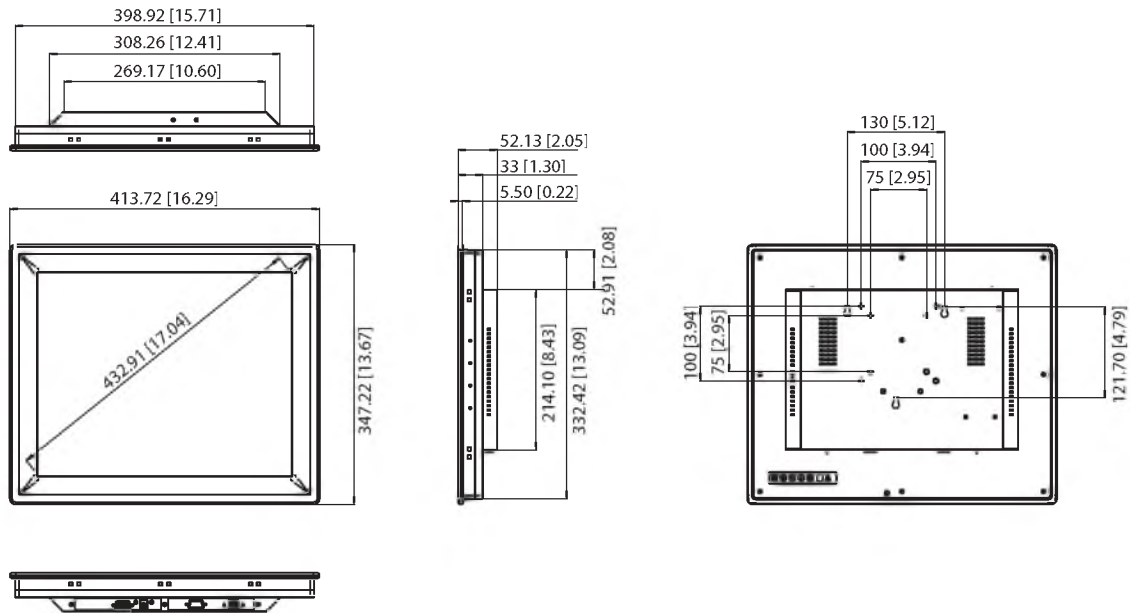

Panel Cut-out Dimensions: 400.92 x 334.42 mm (15.78" x 13.17")

## Accessories

- FPM-2170G-RMKE FPM-2170G Rack-Mount Kit
- FPM-2120G-SMKE FPM-2120G/2150G/2170G Stand Kit
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M

## I/O View




- Touch Screen (USB)
- Touch Screen (RS-232)
- VGA Port
- DC Jack 12V<sub>CC</sub> (100~240V<sub>AC</sub> adapter included)

## Front View



## Rear View

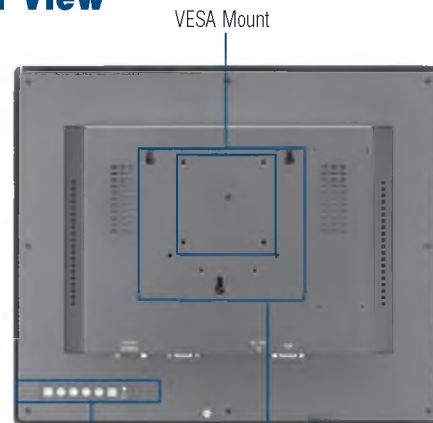

- VESA Mount
- OSD Control Keys
- Wallmount

# FPM-2150G

15" XGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



## Features

- 15" XGA TFT LED LCD with 50,000 hours of backlight life
- Robust design with aluminum front panel
- Lockable OSD control pad on rear cover
- Anti-glare screen with tempered glass and IP65 certified front panel
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

## Introduction

FPM-2150G is an industrial-grade 15" TFT LED LCD flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 15" LCD monitors on the market. The FPM-2150G is also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2150G is especially suitable for industrial PCs. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

## Specifications

### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 383 x 307 x 48.13 mm (15.08" x 12.09" x 1.89")
- **Enclosure** Front panel: Aluminum with coating,  
Rear cover: SECC coating chassis
- **Mounting** Panel, wall, desktop, VESA arm, or rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 4.5 kg (9.9 lbs)

### LCD Display

- **Display Type** XGA TFT LCD with LED backlight
- **Display Size** 15"
- **Max. Resolution** 1024 x 768
- **Max. Color** 16.2M
- **Viewing Angle (H/V)°** 160, 140
- **Luminance (cd/m<sup>2</sup>)** 400
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700 : 1

### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP,Vista,7.8,XPe,CE and Linux

### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

## Ordering Information

- **FPM-2150G-X0AE** 15" XGA Industrial LED Monitor
- **FPM-2150G-R3AE** 15" XGA Industrial LED Backlight Monitor w/Resistive TS (RS-232 and USB interfaces)

## Dimensions

Unit: [mm]

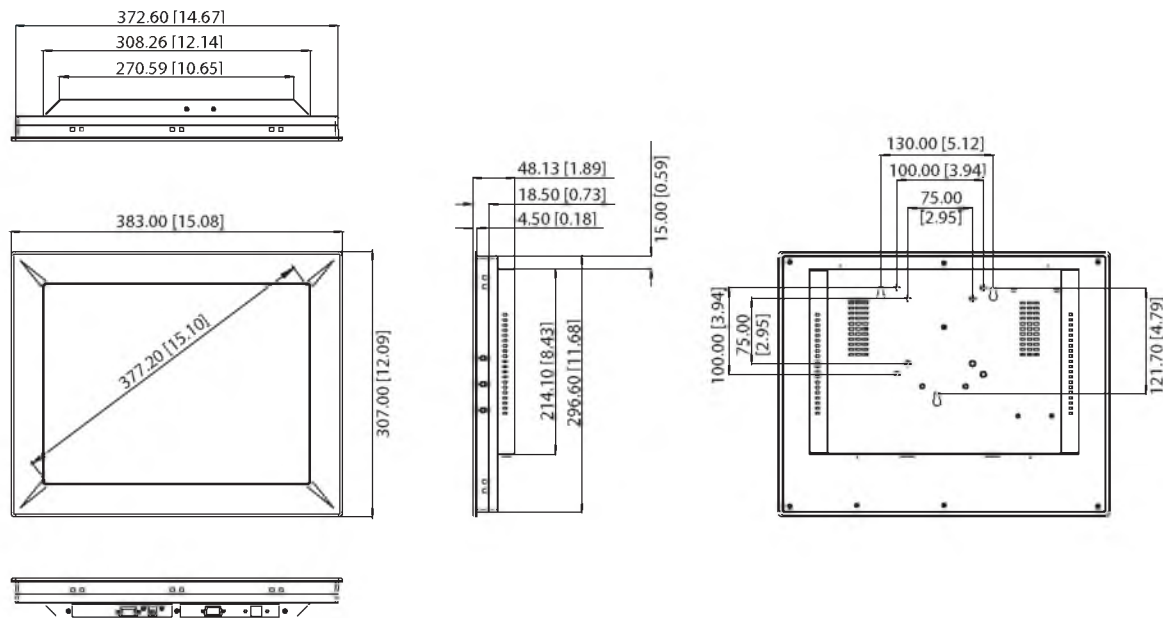


Panel Cut-out Dimensions: 374.6 x 298.6 mm (14.75" x 11.76")

## Accessories

- **FPM-2150G-R1MKE** FPM-2150G Rack-Mount Kit
- **FPM-2120G-SMKE** FPM-2120G/2150G/2170G Stand Kit
- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596** Power Cable China/Australia Plug 1.8 M

## I/O View

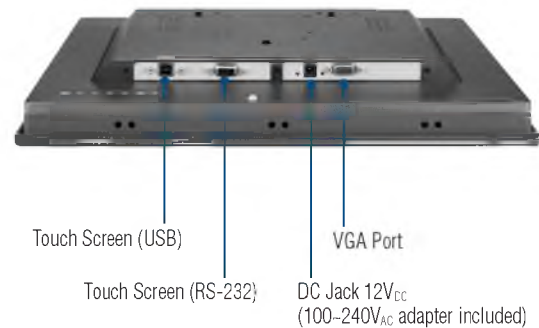

# FPM-2120G

## 12" SVGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

NEW



### Features

- 12" SVGA TFT LED LCD with 50,000 backlight life time
- Robust design with aluminum front panel
- Anti-glare screen with tempered glass
- Supports Panel, Wall, Desktop, Rack or VESA arm mounting
- Combo RS-232 & USB interface for touchscreen function

### Introduction

The FPM-2120G is an industrial-grade 12" TFT LCD with LED backlight flat panel monitor with an Al-Mg front panel, a modern appearance, and one of the most competitive prices for 12" LCD with LED backlight monitor on the market. The FPM-2120G are also extremely light and thin, and provides many industrial-grade features such as a stainless steel chassis, VESA mounting flexibility, and more. The FPM-2120G are especially suitable for industrial PCs such as IPC-610 or IPC-6806. This combination leads to an extremely reliable and tough system, ready to operate in a wide variety of industrial applications.

### Specifications

#### General

- **Button Controls** OSD (Onscreen Display) control pad on rear cover
- **Certification** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 311 x 237 x 40.63 mm (12.24" x 9.33" x 1.60")
- **Enclosure** Front panel: Aluminum, Rear cover: SECC chassis
- **Mounting** Panel, wall, desktop, VESA arm, or 19" rackmount with optional mounting kit
- **Power Input** External 60 W power adapter, with AC 100 V ~ 240 V input and DC +12 V @ 5 A output (included)
- **Video Port** VGA
- **Weight (Net)** 4kg (8.82 lbs)

#### LCD Display

- **Display Type** SVGA TFT LCD with LED backlight
- **Display Size** 12"
- **Max. Resolution** 800 x 600
- **Max. Color** 16.2M
- **Viewing Angle (H/V)°** 160°(V), 140°(H)
- **Luminance (cd/m<sup>2</sup>)** 450
- **Backlight Life (hrs)** 50,000
- **Contrast Ratio** 700:1

#### Touchscreen (Optional)

- **Interface** Combo RS-232 & USB interface
- **Lifespan** 36 millions times with a silicone rubber of R8 finger, hitting rate is calculated as being 250g at 2 times per second
- **OS Support** Windows® XP, Vista, 7, 8, XPe, CE and Linux

#### Environment


- **Operation Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Humidity (Storage)** 10 ~ 95% non-condensing
- **Waterproof** Front Panel IP65 Compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-2120G-X0AE** 12" SVGA Industrial LED Monitor
- **FPM-2120G-R3AE** 12" SVGA Industrial LED Monitor w/Resistive TS (RS-232 and USB interfaces)

## Dimensions

Unit: [mm]

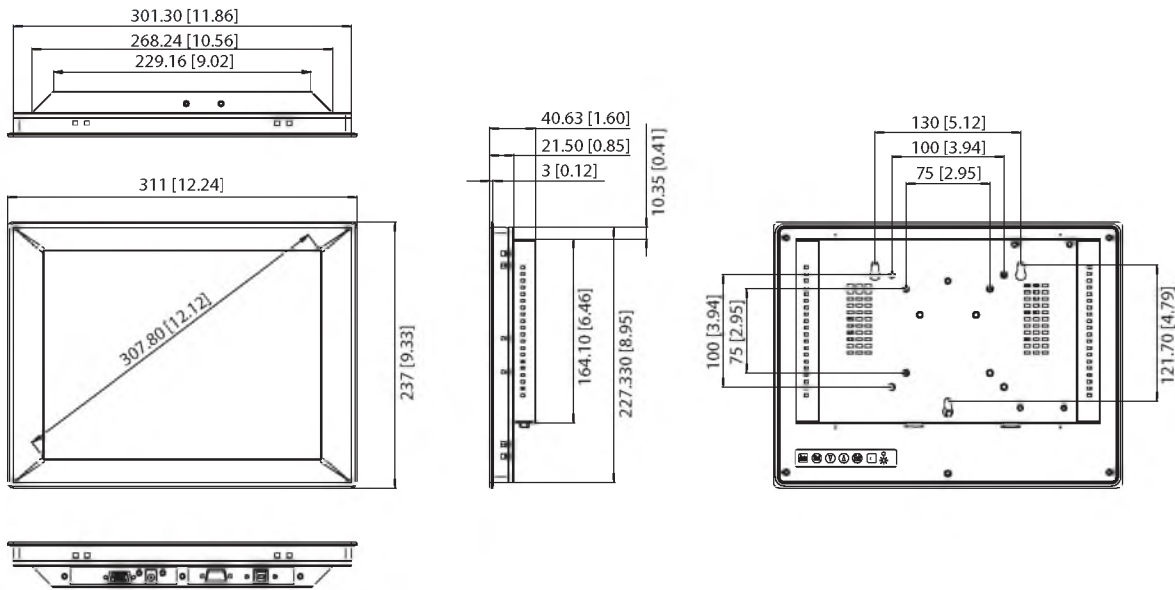

Panel Cut-out Dimensions: 303.3 x 229.3 mm (11.94" x 9.03")

## Accessories

- FPM-2120G-SMKE FPM-2120G/2150G/2170G Stand Kit
- FPM-2120G-RMKE FPM-2120G Rack-Mount Kit
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1700000596 Power Cable China/Australia Plug 1.8 M
- 1702002600 Power Cable US Plug 1.8 M

## I/O View




Touch Screen (USB)      Touch Screen (RS-232)      DC Jack 12V<sub>DC</sub>  
(100-240V<sub>AC</sub> adapter included)      VGA Port

## Front View



## Rear View

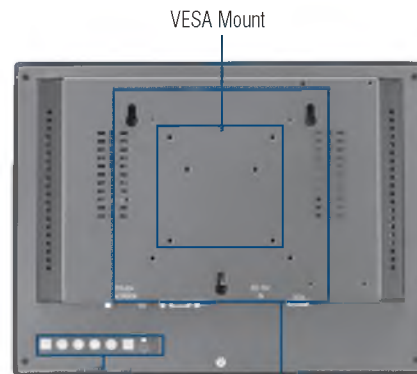

VESA Mount      OSD Control Keys      Wallmount

**По вопросам продаж и поддержки обращайтесь:**

Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Казань (843)206-01-48

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93